

XRS Plus Model Wiring Schematic

(See attached instructions for additional information)

Prewired "Pigtail"
Supplied By Airlift

**Yellow, Blue, Brown, Red, & Orange Wires are only used when additional inputs are required. If additional inputs regarding door position are needed please contact our technical support department for wiring instructions.

Green To Ground

Black To "W"

White To "V"

Red To "U"

Green To "UP Limit"


Black To "DN Limit"

White To COMMON

Terminal Block in Control Box

Please hook only one wire per terminal

**Motor Wiring Must Be
Minimum 12ga Stranded Wire
Supplied By Others**

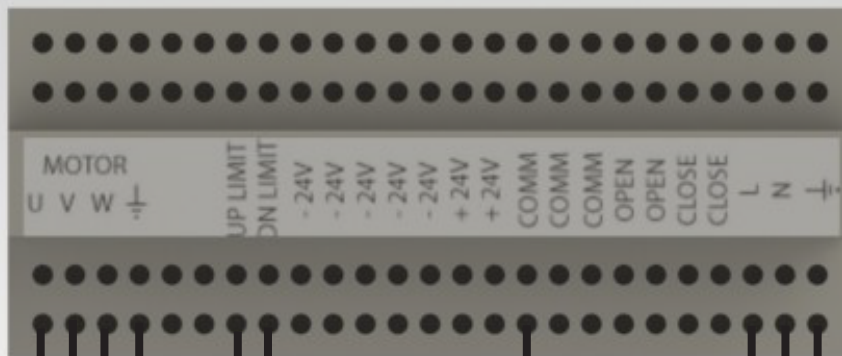

Red

White

Black

Green

**120v Power requires
20amp circuit per
opener**

120v Ground
120v Neutral
120v Hot

**Minimum 12ga Wire
Supplied By Others**